


FEATURES

- Typical 5-A peak source and sink drive current for each channel
- Input and enable pins capable of handling -12 V
- Output capable of handling -2 V transients
- Absolute maximum VDD voltage: 35 V
- Wide VDD operating range from 4.5 V to 30 V with UVLO
- Two independent gate drive channels
- Independent enable function for each output
- Hysteretic-logic thresholds for high noise immunity
- VDD independent input thresholds (TTL compatible)
- Fast propagation delays (22-ns typical)
- Fast rise and fall times (7-ns and 9-ns typical)
- 1-ns typical delay matching between the two channels
- Two channels can be paralleled for higher drive current
- SOP-8L and DFN2X2-8L package options
- Operating junction temperature range of -40 °C to 150 °C

APPLICATIONS

Switch-mode power-supplies (SMPS)
 Power factor correction (PFC) circuits
 DC-DC converter
 Motor drives
 Solar power supplies
 Pulse transformer driver

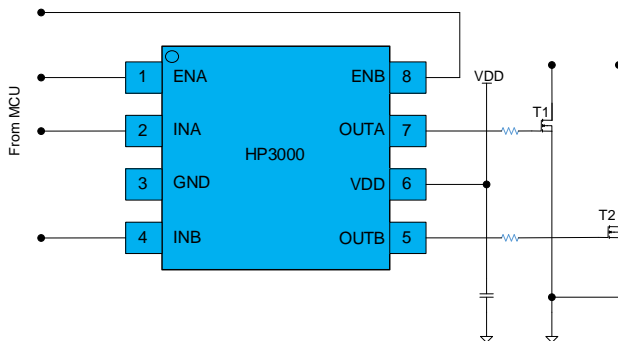

Typical Application Circuit

GENERAL DESCRIPTION

The HP3000 is a dual-channel, high-speed, low-side gate driver that effectively drives MOSFET, IGBT, SiC, and GaN power switches. It has a typical peak drive strength of 5 A which reduces rise and fall times of the power switches, lowers switching losses, and increases efficiency. The fast propagation delay (22-ns typical) yields better power stage efficiency by improving the dead time optimization, pulse width utilization, control loop response, and transient performance of the system.

HP3000 can handle -12 V at its inputs, which improves robustness in systems with moderate ground bouncing. The inputs are independent of supply voltage and can be connected to most controller outputs for maximum control flexibility. An independent enable signal allows the power stage to be controlled independently of main control logic. In the event of a system fault, the gate driver can quickly shut-off by pulling enable low. Many high-frequency switching power supplies exhibit noise at the gate of the power device, which can get injected into the output pin on the gate driver and can cause the driver to malfunction. The HP3000's transient reverse current and reverse voltage capability allow it to tolerate noise on the gate of the power device or pulse-transformer and avoid driver malfunction. The HP3000 also features under voltage lockout (UVLO) for improved system robustness. When there is not enough bias voltage to fully enhance the power device, the gate driver output is held low by the strong internal pull down MOSFET.

Device Information

PART NUMBER	PACKAGE	BODY SIZE
HP3000-AA000-SP08R	SOP-8L	4.90 × 3.90 mm ²
HP3000-AD000-HD08R	DFN2X2-8L	2.00 × 2.00 mm ²

TABLE OF CONTENTS

Features1

Applications1

General Description1

Table of Contents2

 Revision History2

Pin Configuration and Function Descriptions3

Specifications5

Absolute Maximum Ratings7

 Thermal Resistance7

 ESD Caution7

Typical Characteristics8

Package Outline Dimensions 10

Package Top Marking..... 12

Ordering Guide..... 13

Tape And Reel Information..... 14

Important Notice 15

REVISION HISTORY

Version	Date	Descriptions
Rev. 1.0	11/2023	Initial version

PIN CONFIGURATION AND FUNCTION DESCRIPTIONS

TOP VIEW

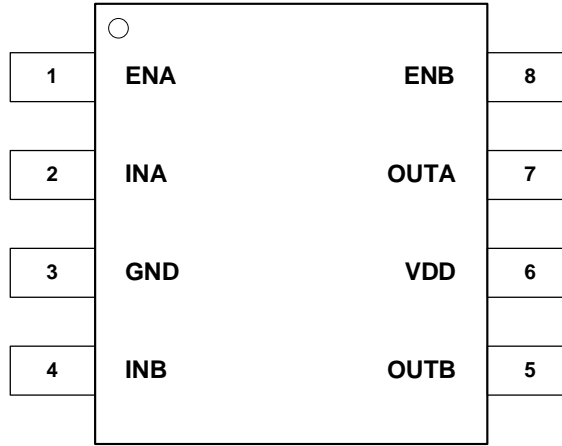


Figure 1 HP3000-AA000-SP08R Pin Assignment

TOP VIEW

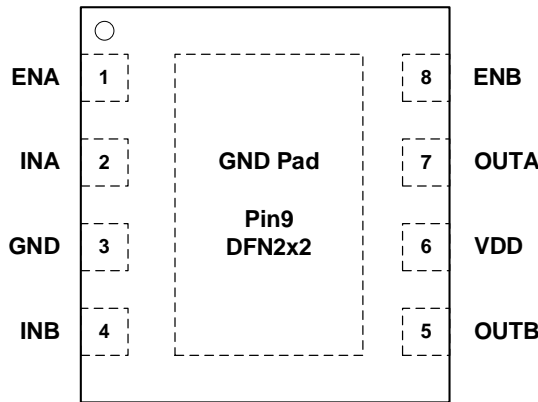


Figure 2 HP3000-AD000-HD08R Pin Assignment

Table 1. Pin Function Descriptions for HP3000-AA000-SP08R, HP3000-AD000-HD08R

Pin No.	Name	Type ¹	Primary Function
1	ENA	I	Enable input for Channel A. Biasing ENA, LOW will disable Channel A output regardless of the state of INA. Pulling ENA, HIGH enables the Channel A output. If ENA is left floating, Channel A is enabled by default due to an internal pull-up resistor. It is recommended to connect this pin to VDD if unused.
2	INA	I	Input to Channel A. INA is the non-inverting input of the HP3000 device. OUTA is held LOW if INA is unbiased or floating by default due to an internal pulldown resistor. Connect this pin to GND if unused.
3	GND	-	Ground: All signals are referenced to this pin.
4	INB	I	Input to Channel B. INB is the non-inverting input of the HP3000 device. OUTB is held LOW if INB is unbiased or floating by default due to an internal pulldown resistor. Connect this pin to GND if unused.
5	OUTB	O	Channel B Output
6	VDD	I	Bias supply input. Bypass this pin with two ceramic capacitors, generally $\geq 1 \mu\text{F}$ and $0.1 \mu\text{F}$, which are referenced to GND pin of this device.

Pin No.	Name	Type ¹	Primary Function
7	OUTA	O	Channel A Output
8	ENB	I	Enable input for Channel B. Biasing ENB, LOW will disable Channel B output regardless of the state of INB. Pulling ENB, HIGH enables the Channel B output. If ENB is left floating, Channel B is enabled by default due to an internal pull-up resistor. It is recommended to connect this pin to VDD if unused.
9	Thermal Pad	-	Connect to GND through large copper plane. This pad is not a low-impedance path to GND

1. I = Input; O = Output

SPECIFICATIONS

$V_{DD} = 12.0\text{ V}$, $T_J = -40^\circ\text{C}$ to $+150^\circ\text{C}$, $1\text{-}\mu\text{F}$ capacitor from V_{DD} to GND, no load on the output, for minimum and maximum specifications, and $T_A = 25^\circ\text{C}$ for typical specifications, unless otherwise noted.

Table 2. Specifications

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
POWER SUPPLY						
Operating Supply Voltage	V_{DD}		4.5	12	30	V
VDD quiescent supply current	I_{DD_Q}	$V_{INx} = 3.3\text{ V}$, $V_{DD} = 3.4\text{ V}$, $ENx = V_{DD}$		260	500	μA
VDD static supply current	I_{DD}	$V_{INx} = 3.3\text{ V}$, $ENx = V_{DD}$		0.4	0.8	mA
VDD operating current	I_{DDO}	$V_{INx} = 0.0\text{ V}$, $ENx = V_{DD}$ $f_{sw} = 1000\text{ kHz}$, $V_{INx} = 0.0\text{ V}$ to 3.3 V PWM, $ENx = V_{DD}$		0.35	0.7	mA
Shutdown current	I_{DD_SD}	$V_{INx} = 3.3\text{ V}$, $ENx = 0\text{ V}$		0.5	0.9	mA
UNDER VOLTAGE LOCKOUT (UVLO)						
VDD UVLO rising threshold	V_{DD_ON}		3.8	4.1	4.4	V
VDD UVLO falling threshold	V_{DD_OFF}		3.5	3.8	4.1	V
VDD UVLO hysteresis	V_{DD_HYST}			0.3		V
INPUT (INA, INB)						
Input signal high threshold	V_{INx_H}	Output High, $ENx = \text{HIGH}$	1.8	2	2.2	V
Input signal low threshold	V_{INx_L}	Output Low, $ENx = \text{HIGH}$	0.8	1	1.2	V
Input signal hysteresis	V_{INx_HYST}			1		V
Input pin pulldown resistor	R_{INx}	$INx = 3.3\text{ V}$		120		$\text{k}\Omega$
ENABLE (ENA, ENB)						
Enable signal high threshold	V_{ENx_H}	Output High, $INx = \text{HIGH}$	1.8	2	2.2	V
Enable signal low threshold	V_{ENx_L}	Output Low $INx = \text{HIGH}$	0.8	1	1.2	V
Enable signal hysteresis	V_{ENx_HYST}			1		V
Enable pin pull-up resistor	R_{ENx}	$ENx = 0\text{ V}$		200		$\text{k}\Omega$
OUTPUTS (OUTA, OUTB)						
Peak output source current	I_{SRC}	$V_{DD} = 12\text{ V}$, $C_{VDD} = 10\text{ }\mu\text{F}$, $C_L = 0.1\text{ }\mu\text{F}$, $f = 1\text{ kHz}$		5		A
Peak output sink current	I_{SNK}	$V_{DD} = 12\text{ V}$, $C_{VDD} = 10\text{ }\mu\text{F}$, $C_L = 0.1\text{ }\mu\text{F}$, $f = 1\text{ kHz}$		5		A
Pullup resistance	R_{CH}	$I_{OUT} = -50\text{ mA}$		0.8	1.32	Ω
Pulldown resistance	R_{CL}	$I_{OUT} = 50\text{ mA}$		0.6	1.15	Ω
Switching Characteristics						
Rise time	t_{Rx}	$C_{LOAD} = 1.8\text{ nF}$, 20% to 80%, $V_{in} = 0\text{ V}$ to 3.3 V		7	13	ns
Fall time	t_{Fx}	$C_{LOAD} = 1.8\text{ nF}$, 80% to 20%, $V_{in} = 0\text{ V}$ to 3.3 V		9	15	ns
Turn-on propagation delay	t_{D1x}	$C_{LOAD} = 1.8\text{ nF}$, V_{INx_H} of the input rise to 10% of output rise, $V_{in} = 0\text{ V}$ to 3.3 V , $f_{sw} = 500\text{ kHz}$, 50% duty cycle, $T_J = 125^\circ\text{C}$		22	32	ns
Turn-off propagation delay	t_{D2x}	$C_{LOAD} = 1.8\text{ nF}$, V_{INx_L} of the input fall to 90% of output fall, $V_{in} = 0\text{ V}$ to 3.3 V , $f_{sw} = 500\text{ kHz}$, 50% duty cycle, $T_J = 125^\circ\text{C}$		22	32	ns
Enable propagation delay	t_{D3x}	$C_{LOAD} = 1.8\text{ nF}$, V_{ENx_H} of the enable rise to 10% of output rise, $V_{IN} = 0\text{ V}$ to 3.3 V , $f_{sw} = 500\text{ kHz}$, 50% duty cycle, $T_J = 125^\circ\text{C}$		22	32	ns

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Disable propagation delay	t_{D4x}	$C_{LOAD} = 1.8 \text{ nF}$, V_{ENx_L} of the enable fall to 10% of output fall, $V_{IN} = 0 \text{ V}$ to 3.3 V , $f_{SW} = 500 \text{ kHz}$, 50% duty cycle, $T_J = 125 \text{ }^\circ\text{C}$		22	32	ns
Delay matching between two channels	t_M	$C_{LOAD} = 1.8 \text{ nF}$, $V_{IN} = 0 \text{ V}$ to 3.3 V , $f_{SW} = 500 \text{ kHz}$, 50% duty cycle, $I_{NA} = I_{NB}$, $ t_{RA} - t_{RB} $, $ t_{FA} - t_{FB} $		1	2	ns
Minimum input pulse width	t_{PWmin}	$C_{LOAD} = 1.8 \text{ nF}$, $V_{IN} = 0 \text{ V}$ to 3.3 V , $f_{SW} = 500 \text{ kHz}$, $V_O > 1.5 \text{ V}$		10	15	ns

1 Legend:

A = Analog Pin

P = Power Pin

D = Digital Pin

I = Input Pin

O = Output Pin

ABSOLUTE MAXIMUM RATINGS

Table 3. Absolute maximum ratings

Parameter	Rating
Supply voltage, VDD (Continuous)	35 V
Output voltage, OUTA, OUTB (DC)	-0.3 V to VDD + 0.3 V
Output voltage, OUTA, OUTB (200ns Pulse)	-2 V to VDD + 3 V
Input voltage INA, INB, ENA, ENB	-12 V to 35 V
Operating temperature range (junction)	-40°C to +150°C
Soldering conditions	JEDEC J-STD-020
Electrostatic Discharge (ESD)	
Human body model	±2000 V
Charged device model	±1000 V

Stresses at or above those listed under Absolute Maximum Ratings may cause permanent damage to the product. This is a stress rating only; functional operation of the product at these or any other conditions above those indicated in the operational section of this specification is not implied. Operation beyond the maximum operating conditions for extended periods may affect product reliability.

THERMAL RESISTANCE

Thermal performance is directly linked to printed circuit board (PCB) design and operating environment. Close attention to PCB thermal design is required.

θ_{JA} is the natural convection junction to ambient thermal resistance measured in a one cubic foot sealed enclosure.

θ_{JC} is the junction to case thermal resistance.

Table 4. Thermal Resistance

Package Type	θ_{JA}	θ_{JC}	Unit
8-lead SOP	133.9	59.7	°C/W
8-lead DFN2x2-8L	92	74.5	°C/W

ESD CAUTION








Electrostatic Discharge Sensitive Device.

Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

TYPICAL CHARACTERISTICS

Unless otherwise specified, $V_{DD} = 12\text{ V}$, $I_{NX} = 3.3\text{ V}$, $E_{NX} = 3.3\text{ V}$, $T_J = 25^\circ\text{C}$, no load.

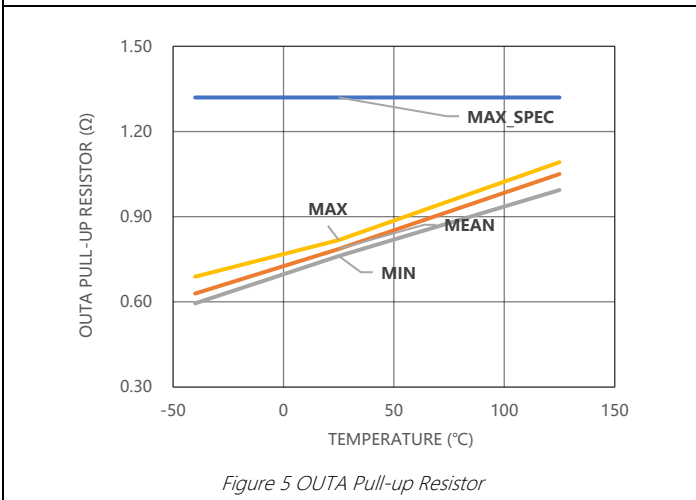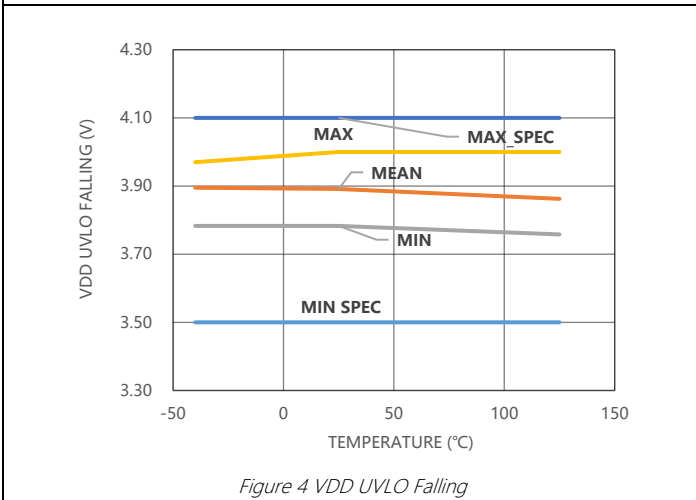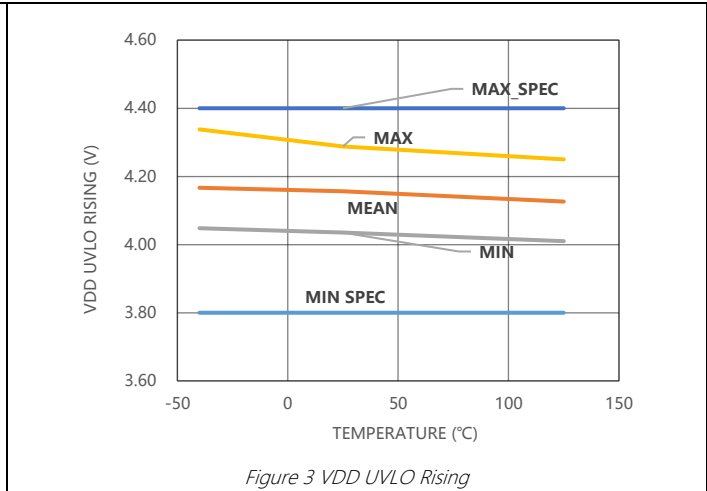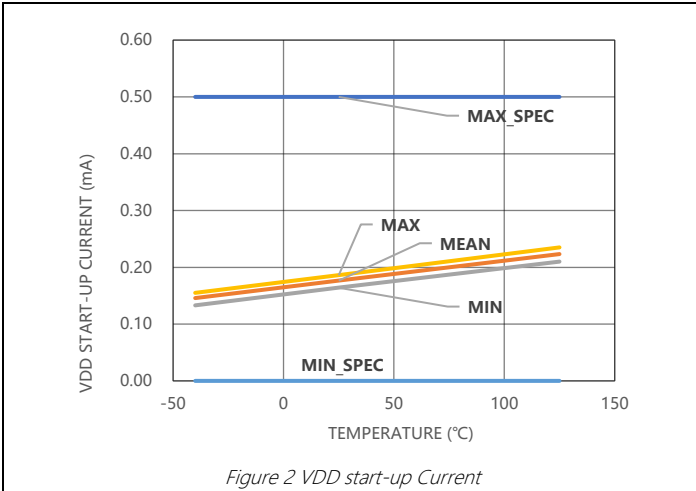

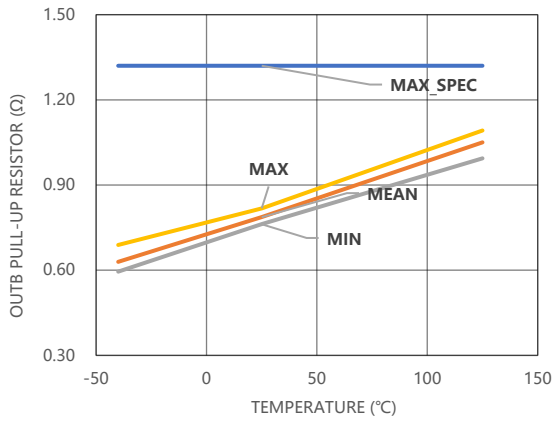


Figure 7 OUTB Pull-up Resistor


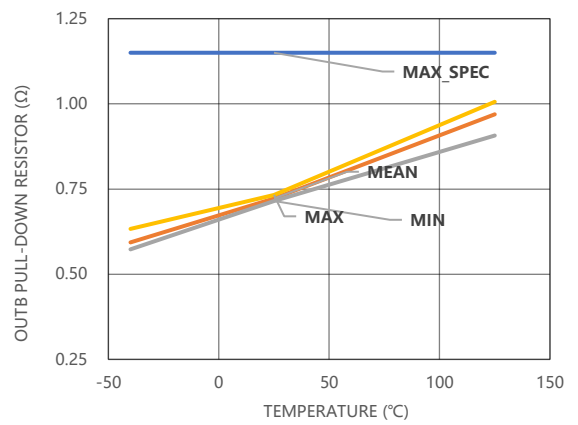



Figure 8 OUTB Pull-down Resistor

PACKAGE OUTLINE DIMENSIONS

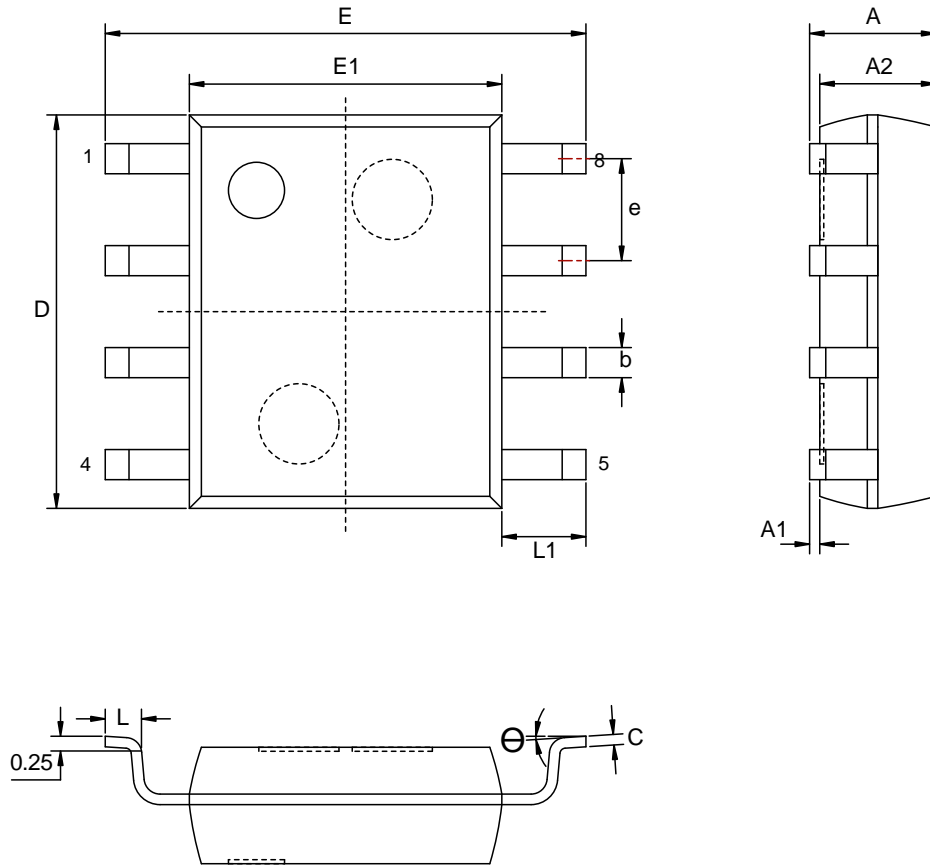

SYMBOLS	DIMENSION IN MILLIMETERS		
	MIN	NOM	MAX
A	-	-	1.75
A1	0.10	-	0.25
A2	1.35	1.45	1.55
b	0.30	-	0.51
C	0.17	-	0.25
D	4.70	4.90	5.10
E	5.80	6.00	6.20
E1	3.80	3.90	4.00
e	1.27 BSC		
L	0.40	-	1.27
θ	0°	-	8°


Figure 9 HP3000-AA000-SP08R Dimension

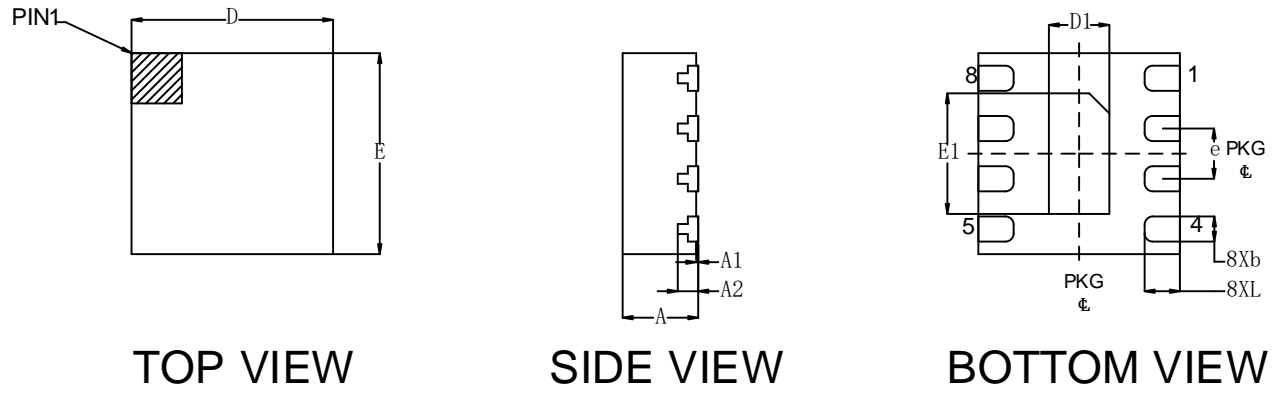

SYMBOLS	DIMENSION IN MILLIMETERS		
	MIN	NOM	MAX
A	0.70	0.75	0.80
A1	0.00	0.02	0.05
A2	0.203 REF		
b	0.20	0.25	0.30
D	2 BSC		
E	2 BSC		
e	0.5 BSC		
L	0.30	0.35	0.40
D1	0.55	0.60	0.65
E1	1.15	1.20	1.25


Figure 10 HP3000-AD000-HD08R Dimension

PACKAGE TOP MARKING

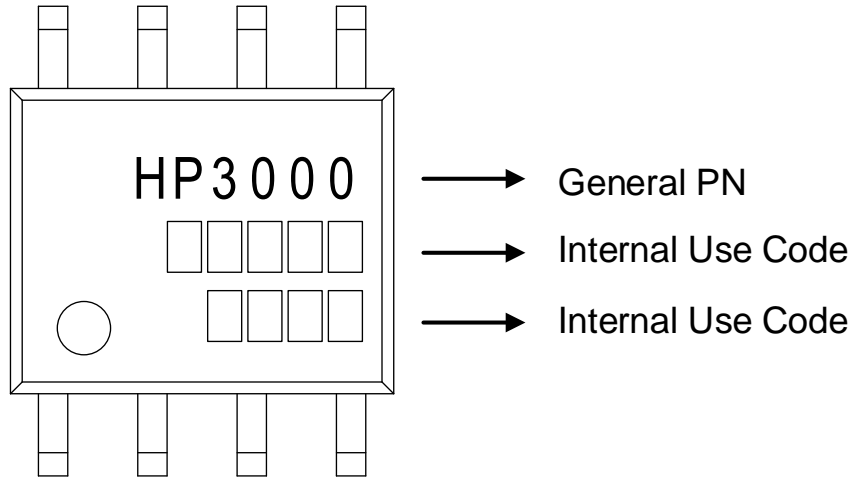

SOP 8L

Figure 11 HP3000-AA000-SP08R Package Top Marking

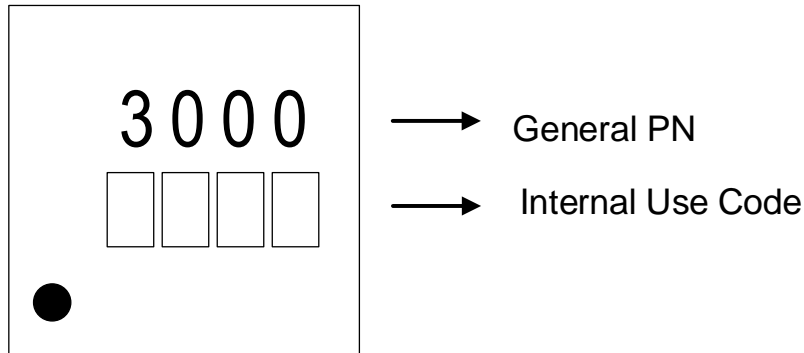



DFN2X2-8L

Figure 12 HP3000-AD000-HD08R Package Top Marking

ORDERING GUIDE

Model	Package Type	Tj Temp (°C)	MSL	Package	Package Qty
HP3000-AA000-SP08R	SOP8L	-40~150	Level 2	T&R	4000ea
HP3000-AD000-HD08R	DFN2×2-8L	-40~150	Level 1	T&R	4000ea

TAPE AND REEL INFORMATION

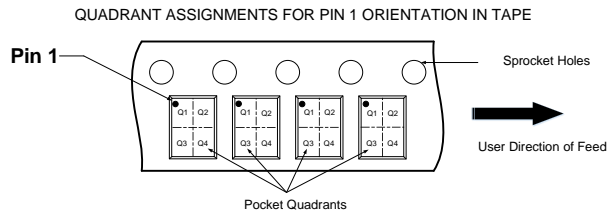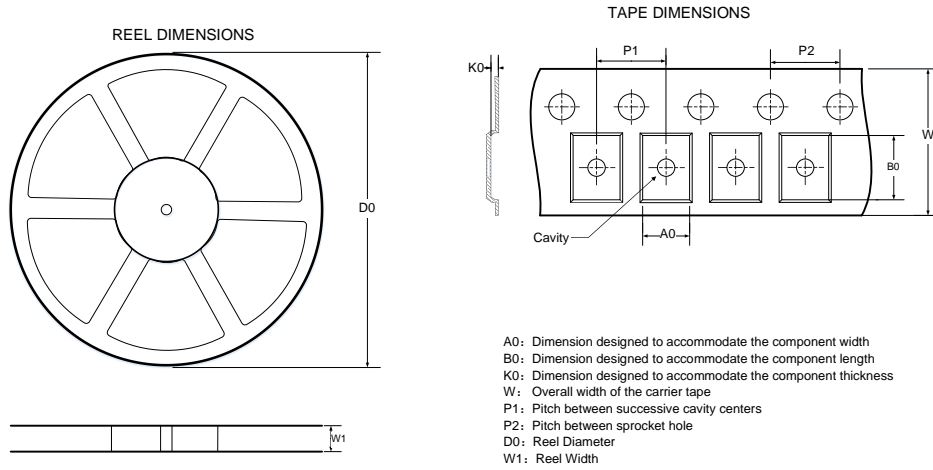

DIMENSIONS AND PIN1 ORIENTATION

Device	Package Type	D0 (mm)	W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant	Quantity
HP3000-AAXXX-SP08R	SOP8L	330.00	12.40	6.40	5.40	2.10	8.00	4.00	12.00	Q1	4000
HP3000-ADXXX-HD08R	DFN2X2-8L	180.00	9.50	2.30	2.30	1.10	4.00	4.00	8.00	Q2	4000

All dimensions are nominal

Figure 13 Tape and Reel Information

IMPORTANT NOTICE

Oriental Semiconductor Co., Ltd. and its subsidiaries (Orientalsemi) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as “components”) are sold subject to Orientalsemi’s terms and conditions of sale supplied at the time of order acknowledgment.

Orientalsemi warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in Orientalsemi’s terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent Orientalsemi deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

Orientalsemi assumes no liability for applications assistance or the design of Buyers’ products. Buyers are responsible for their products and applications using Orientalsemi components. To minimize the risks associated with Buyers’ products and applications, Buyers should provide adequate design and operating safeguards.

Orientalsemi does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which Orientalsemi components or services are used. Information published by Orientalsemi regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from Orientalsemi under the patents or other intellectual property of Orientalsemi.

Reproduction of significant portions of Orientalsemi information in Orientalsemi data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Orientalsemi is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of Orientalsemi components or services with statements different from or beyond the parameters stated by Orientalsemi for that component or service voids all express and any implied warranties for the associated Orientalsemi component or service and is an unfair and deceptive business practice.

Orientalsemi is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of Orientalsemi components in its applications, notwithstanding any applications-related information or support that may be provided by Orientalsemi. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify Orientalsemi and its representatives against any damages arising out of the use of any Orientalsemi components in safety-critical applications.

In some cases, Orientalsemi components may be promoted specifically to facilitate safety-related applications. With such components, Orientalsemi’s goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No Orientalsemi components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those Orientalsemi components which Orientalsemi has specifically designated as military grade or “enhanced plastic” are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of Orientalsemi components which have not been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

Orientalsemi has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, Orientalsemi will not be responsible for any failure to meet ISO/TS16949.

Please refer to below URL for other products and solutions of Oriental Semiconductor Co., Ltd.